

## DS-UPS600-x UPS



- Built-in AVR
- Super fast charging
- Wide input voltage range
- Overload protection
- Short circuit protection
- Surge protection




## ▪ Specification


| <b>Power</b>          |   |
|-----------------------|---|
| UPS Capacity          | 600 VA / 360 W  |
| <b>Input</b>          |   |
| Input Voltage Range   | 85 VAC to 150 VAC   |
| Input Frequency       | 50/60 Hz self-adaptive  |
| Plug Type             | Type B (NEMA 5-15)  |
| <b>Output</b>         |   |
| Output Voltage Range  | 110 VAC to 125 VAC  |
| Output Frequency      | 50/60 Hz ± 0.5 Hz self-adaptive   |
| Transfer Time         | ≤ 10 ms   |
| Waveform              | PWM   |
| Outlet Type           | Type B (NEMA 5-15)  |
| Outlet Number         | Battery outlet*4 & Bypass*2   |
| <b>Battery</b>        |   |
| Battery Type          | 12 V/7 Ah, lead-acid battery  |
| Recharge Time         | 4-6 hours recover to 90% capacity   |
| Typical Backup Time   | Run time at 60w: 35 min<br>Run time at 100w: 20 min<br>Run time at 200w: 3 min  |
| <b>Interface</b>      |   |
| Communicate Ports     | No  |
| <b>Protection</b>     |   |
| Full Protection       | Surge protection,Overload protection,Discharge protection,Overcharge protection   |
| <b>Indicator</b>      |   |
| Display               | LED indicator<br>Working Mode (AC Mode): Solid green<br>Charging Mode (DC Mode): Solid red<br>Overloading Mode: Flashing yellow   |
| Alarm                 | Charging Mode (DC mode): Sounding every 8 seconds<br>Low Battery: Sounding every second<br>Overloading Mode: Sounding every 0.5 seconds<br>Fault: Continuously sounding |
| <b>General</b>        |   |
| Operating Temperature | 0 °C to 40 °C (32 °F to 104 °F)   |
| Operating Humidity    | 30% to 90% (non-condensing)   |
| Dimension             | 274 mm × 95 mm × 139 mm (10.79" × 3.74" × 5.47")  |
| Weight                | Approx. 4.2 kg (9.26 lb)  |

## ▪ Available Model

DS-UPS600-x

▪ Dimension

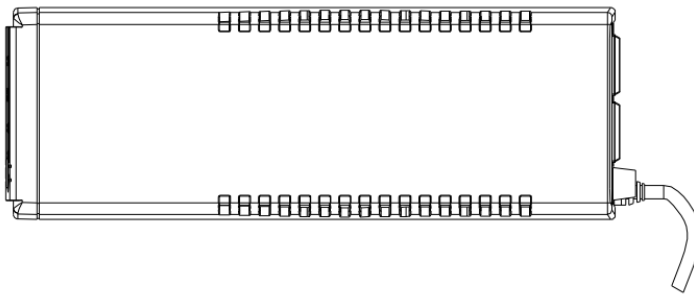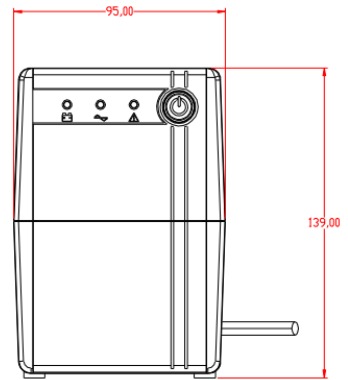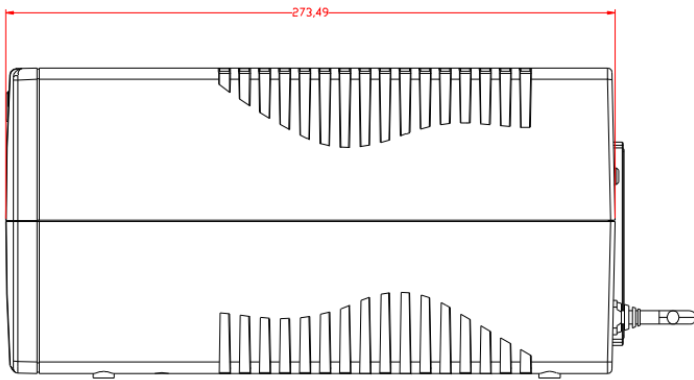

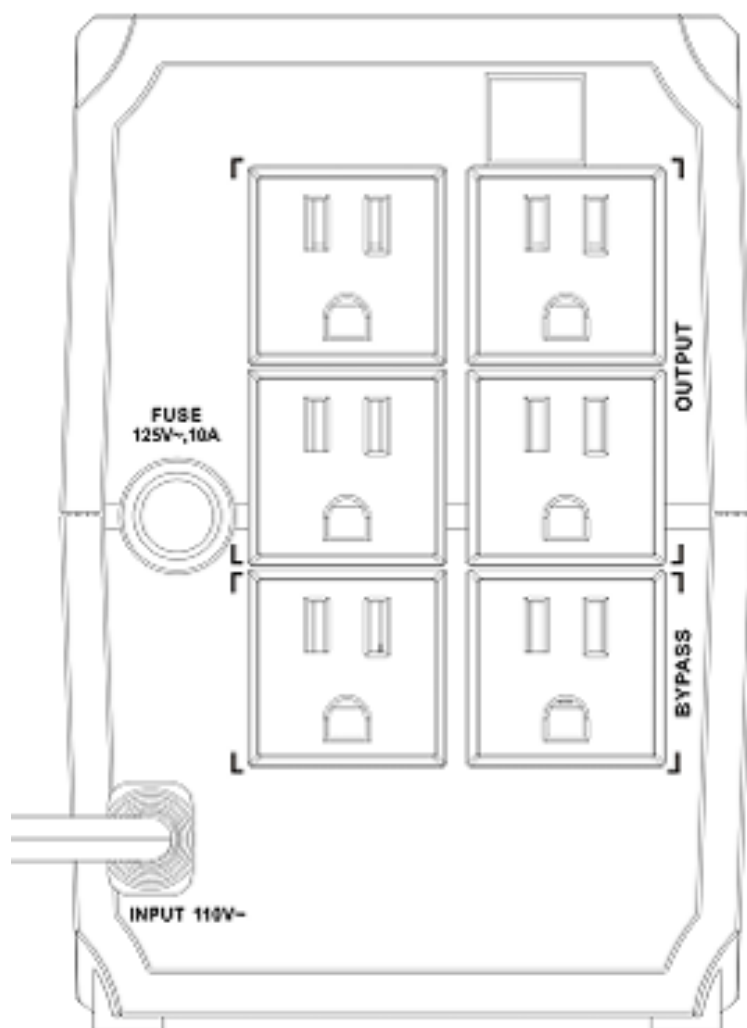

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.

