


# LANĴURI FLYER - STAS 4833 - FLYER CHAIN

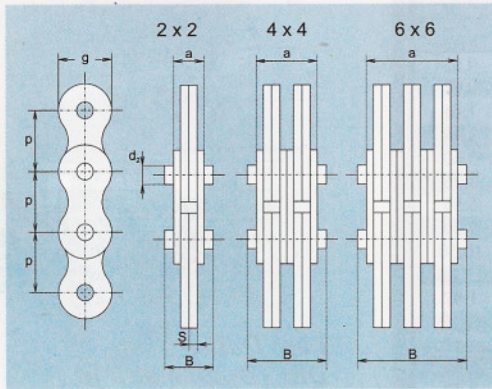

Tip	p			a	B	d <sub>2</sub>	S	g	F <sub>R</sub>	M
	mm	in		max	max	max	max	max	max	N
LL 1222	19,05	3/4	2 x 2	10,4	16	5,94	2,4	15,62	32000	0,9
LL 1244			4 x 4	20,4	25					
LL 1266			6 x 6	30,4	35					
LL 1622	25,40	1	2 x 2	13,8	21	7,92	3,2	20,83	48000	1,6
LL 1644			4 x 4	26,9	32					
LL 1666			6 x 6	40,3	46					
LL 2022	31,75	1 1/4	2 x 2	16,7	24	9,53	4,0	26,04	71000	2,4
LL 2044			4 x 4	35,2	41					
LL 2066			6 x 6	50,2	55					
LL 2422	38,10	1 1/2	2 x 2	19,8	26	11,10	4,8	31,24	100000	3,5
LL 2444			4 x 4	39,8	45					
LL 2466			6 x 6	59,8	66					
LL 2822	44,45	1 3/4	2 x 2	23,4	30	12,70	5,6	36,45	137000	4,9
LL 2844			4 x 4	47,4	54					
LL 2866			6 x 6	70,4	75					
LL 3222	50,80	2	2 x 2	26,9	34	14,27	6,4	41,66	181000	6,1
LL 3244			4 x 4	53,8	61					
LL 3266			6 x 6	80,8	88					